

## C-WP-A-SL-4L Series

LED Architectural Slim Wall Pack/Flood - Small

Replaces 100W PSMH/175 MH

**C-LITE**  
LED LIGHTING BY CREE

**EXCEPTIONAL ILLUMINATION FOR YOUR ENTIRE BUILDING PERIMETER WITH A CONSISTENT LOOK.**



### PRODUCT SPECIFICATIONS

#### OVERVIEW

- Initial Delivered Lumens: 3,900
- CRI:  $\geq 70$
- CCT: Neutral White (4000K), Cool White 5000K
- Input Power: 40 Watts
- Dimmable: No
- Operating Minimum:  $-40^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$ )
- Lifespan: Estimated  $>133,000$  Hours
- Power Factor:  $> 0.9$
- Total Harmonic Distortion:  $< 20\%$
- Limited Warranty: 5 Years\*
- Replaces 100W/175W PSMH

RECOMMENDED USE	INPUT VOLTAGE	VERSATILE	
<ul style="list-style-type: none"><li>• Security</li><li>• Perimeter Lighting</li><li>• When control of spill light is important</li><li>• Flood and uplighting with adjustable mounting accessories</li></ul>	<ul style="list-style-type: none"><li>• Universal (120V through 277V Operation)</li></ul>	<ul style="list-style-type: none"><li>• Floodlight - Wall Mounted (use C-ACC-A-AUBAS-SM-DB)</li><li>• Floodlight - Pole Mounted (use C-ACC-A-2SFAS-SM-DB)</li></ul>	<ul style="list-style-type: none"><li>• Floodlight - Ground Mounted (use C-ACC-A-SMBAS-DB)</li><li>• Wall Pack - Wall Mounted (use C-ACC-A-12SFAS-SM-DB)</li></ul>

### ORDERING INFORMATION

Example: C-WP-A-SL-4L-40K-DB

C-WP-A	SL	4L		DB
PRODUCT	TYPE	LUMEN PACKAGE	CCT	COLOR
C-WP-A	SL LED Architectural Slim Wall Pack/Flood	4L 3,900 Lumens 40W	40K Neutral White (4000K) 50K Cool White (5000K)	DB Dark Bronze

#### CERTIFICATIONS:

US: c-lite.com T (800) 236-6800 F (262) 504-5415


Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507

Rev. Date: V3 11/30/2017

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details



# C-WP-A-SL-4L Series

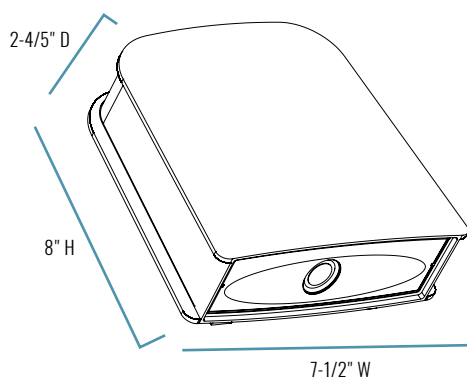

## SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
2-4/5" D x 7-1/2" W x 8" H	3.6 lbs.	8 to 20 feet	1 to 2 times the mounting height

## FIXTURE SPECIFICATIONS

HOUSING	Sturdy, die-cast aluminum housing Dark bronze polyester powder-coat finish
LENS ASSEMBLY	Tempered glass lens is thermal, shock & impact resistant
MOUNTING	Included mounting plate mounts over 4" square or octagonal junction box

## ELECTRICAL PERFORMANCE






OPERATING MINIMUM	LIFESPAN L <sub>70</sub> AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°C (-40°F)	Estimated >133,000 Hours	> 0.9	< 20%	No
INPUT VOLTAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	0.33A	0.19A	0.16A	0.14A

## WARRANTY AND CERTIFICATIONS

WARRANTY	UL LISTED	DLC
5 Year Limited*	Wet Locations	DLC Qualified

# C-WP-A-SL-4L Series

## ACCESSORIES

	<b>PHOTOCELL - BUTTON, 120V/208V/240V/277V</b>  SKU: <b>C-ACC-A-PCCELL-LV</b> (120V) <b>C-ACC-A-PCCELL-HV</b> (208V/240V/277V) USE: Can only be installed with one of the mounting accessories listed. Photocell is field installed and drilling of the back box is required.
	<b>SURFACE MOUNTING BOX</b>  SKU: <b>C-ACC-A-SMBAS-DB</b> USE: For use where there is no existing junction box or for easy through-wiring
	<b>2" ADJUSTABLE SLIP FITTER</b>  SKU: <b>C-ACC-A-2SFAS-SM-DB</b> USE: Fits over 2-3/8" O.D. pipe
	<b>ADJUSTABLE U-BRACKET</b>  SKU: <b>C-ACC-A-AUBAS-SM-DB</b> USE: Comes with 24" cord
	<b>1/2" SWIVEL FITTER</b>  SKU: <b>C-ACC-A-12SFAS-SM-DB</b>